





# 防眩椭圆孔天花灯(Ø55无边)

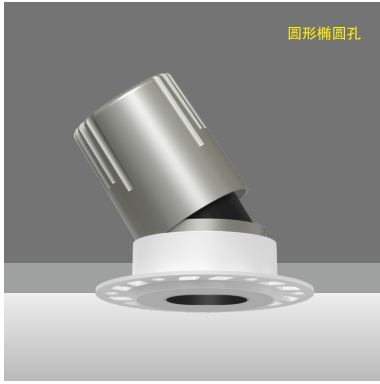

圆形椭圆孔



\*可选配件



## 产品特性

灯具颜色: 金属灰+白色面板  
 主体材质: 压铸铝  
 光学系统: 透镜+面板  
 灯具外观: 金属质感  
 投射方向: 垂直0~30°、水平0~355°  
 防护等级: IP20 可选配IP44防水组件  
 环境温度: -20°~40°  
 重量: 130g

## 产品规格

开孔尺寸: Ø55mm  
 功率: 7W  
 光束角度: 15°、24°、36°  
 天花厚度: 2mm~25mm  
 安装方式: 嵌入式  
 吊顶空间: 大于100mm  
 防眩角度: 40°

输入电压: 220~240V~50Hz  
 输入电流: 33mA  
 显指: Ra92  
 色温: 2700K、3000K、3500K、4000K  
 光通量: 406lm、423lm、452lm、469lm (15°)  
 449lm、468lm、501lm、519lm (24°)  
 480lm、500lm、536lm、556lm (36°)

以下可调光款为可控硅调光; 0-10V调光:T改为M

**2700K**  
 TSF4055W07-TB2715  
 TSF4055W07-NB2715

可调光  
 不可调光

15°

h(m)	D(cm)	average (lx)	center (lx)
1.0	29	2543	3650
2.0	57	636	913
3.0	86	283	406
4.0	114	159	228

**3000K**  
 TSF4055W07-TB3015  
 TSF4055W07-NB3015


h(m)	D(cm)	average (lx)	center (lx)
1.0	29	2649	3802
2.0	57	662	951
3.0	86	294	423
4.0	114	166	238

**3500K**  
 TSF4055W07-TB3515  
 TSF4055W07-NB3515

h(m)	D(cm)	average (lx)	center (lx)
1.0	29	2834	4068
2.0	57	709	1017
3.0	86	315	452
4.0	114	177	254

**4000K**  
 TSF4055W07-TB4015  
 TSF4055W07-NB4015

h(m)	D(cm)	average (lx)	center (lx)
1.0	29	2940	4220
2.0	57	735	1055
3.0	86	327	469
4.0	114	184	264



**2700K**  
 TSF4055W07-TB2724  
 TSF4055W07-NB2724

可调光  
 不可调光

24°

h(m)	D(cm)	average (lx)	center (lx)
1.0	39	1610	2354
2.0	79	403	589
3.0	118	179	262
4.0	157	101	147

**3000K**  
 TSF4055W07-TB3024  
 TSF4055W07-NB3024


h(m)	D(cm)	average (lx)	center (lx)
1.0	39	1677	2452
2.0	79	419	613
3.0	118	186	273
4.0	157	105	153

**3500K**  
 TSF4055W07-TB3524  
 TSF4055W07-NB3524

h(m)	D(cm)	average (lx)	center (lx)
1.0	39	1795	2624
2.0	79	449	656
3.0	118	199	292
4.0	157	112	164

**4000K**  
 TSF4055W07-TB4024  
 TSF4055W07-NB4024

h(m)	D(cm)	average (lx)	center (lx)
1.0	39	1862	2722
2.0	79	466	681
3.0	118	207	302
4.0	157	116	170



**2700K**  
 TSF4055W07-TB2736  
 TSF4055W07-NB2736

可调光  
 不可调光

36°

h(m)	D(cm)	average (lx)	center (lx)
1.0	62	795	1217
2.0	123	199	304
3.0	184	88	135
4.0	246	50	76

**3000K**  
 TSF4055W07-TB3036  
 TSF4055W07-NB3036

h(m)	D(cm)	average (lx)	center (lx)
1.0	62	828	1268
2.0	123	207	317
3.0	184	92	141
4.0	246	52	79

**3500K**  
 TSF4055W07-TB3536  
 TSF4055W07-NB3536

h(m)	D(cm)	average (lx)	center (lx)
1.0	62	886	1357
2.0	123	222	339
3.0	184	98	151
4.0	246	55	85

**4000K**  
 TSF4055W07-TB4036  
 TSF4055W07-NB4036

h(m)	D(cm)	average (lx)	center (lx)
1.0	62	919	1408
2.0	123	230	352
3.0	184	102	156
4.0	246	57	88

