




- 柔光片
 - 防眩网
 - 防眩杯(亮银)
 - 防眩杯(哑黑)
 - 防眩杯(白色)
- *可选配件

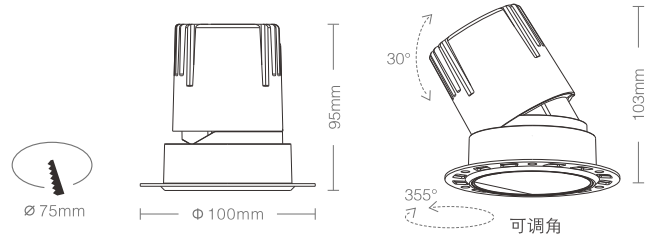

产品特性

灯具颜色: 金属灰+白色面板
 主体材质: 压铸铝
 光学系统: 透镜+防眩杯
 灯具外观: 金属质感
 投射方向: 垂直0~30°、水平0~355°
 防护等级: IP20 可选配IP44防水组件
 环境温度: -20°~40°
 重量: 278g

产品规格

开孔尺寸: Ø75mm
 功率: 7W
 光束角度: 15°、24°、36°、60°
 天花厚度: 2mm~25mm
 安装方式: 嵌入式
 吊顶空间: 大于115mm
 防眩角度: 40°

输入电压: 220~240V~50Hz
 输入电流: 33mA
 显指: Ra92
 色温: 2700K、3000K、3500K、4000K
 光通量: 406lm、423lm、452lm、469lm (15°)
 449lm、468lm、501lm、519lm (24°)
 480lm、500lm、536lm、556lm (36°)
 418lm、435lm、465lm、483lm (60°)

以下可调光款为可控硅调光, 0~10V调光:T改为M

色温	光束角	型号	h(m)	D(cm)	average (lx)	center (lx)	光通量 (lm)
2700K	15°	TSF7075W07-TB2715	1.0	29	2543	3650	406
		TSF7075W07-NB2715	1.0	29	2649	3802	449
3000K	15°	TSF7075W07-TB3015	1.0	29	2649	3802	449
		TSF7075W07-NB3015	1.0	29	2649	3802	449
3500K	15°	TSF7075W07-TB3515	1.0	29	2834	4068	480
		TSF7075W07-NB3515	1.0	29	2834	4068	480
4000K	15°	TSF7075W07-TB4015	1.0	29	2940	4220	418
		TSF7075W07-NB4015	1.0	29	2940	4220	418
2700K	24°	TSF7075W07-TB2724	1.0	39	1610	2354	449
		TSF7075W07-NB2724	1.0	39	1610	2354	449
3000K	24°	TSF7075W07-TB3024	1.0	39	1677	2452	480
		TSF7075W07-NB3024	1.0	39	1677	2452	480
3500K	24°	TSF7075W07-TB3524	1.0	39	1795	2624	418
		TSF7075W07-NB3524	1.0	39	1795	2624	418
4000K	24°	TSF7075W07-TB4024	1.0	39	1862	2722	435
		TSF7075W07-NB4024	1.0	39	1862	2722	435
2700K	36°	TSF7075W07-TB2736	1.0	62	795	1217	465
		TSF7075W07-NB2736	1.0	62	795	1217	465
3000K	36°	TSF7075W07-TB3036	1.0	62	828	1268	483
		TSF7075W07-NB3036	1.0	62	828	1268	483
3500K	36°	TSF7075W07-TB3536	1.0	62	886	1357	465
		TSF7075W07-NB3536	1.0	62	886	1357	465
4000K	36°	TSF7075W07-TB4036	1.0	62	919	1408	435
		TSF7075W07-NB4036	1.0	62	919	1408	435
2700K	60°	TSF7075W07-TB2760	1.0	91	402	606	519
		TSF7075W07-NB2760	1.0	91	402	606	519
3000K	60°	TSF7075W07-TB3060	1.0	91	419	631	536
		TSF7075W07-NB3060	1.0	91	419	631	536
3500K	60°	TSF7075W07-TB3560	1.0	91	448	675	500
		TSF7075W07-NB3560	1.0	91	448	675	500
4000K	60°	TSF7075W07-TB4060	1.0	91	465	701	483
		TSF7075W07-NB4060	1.0	91	465	701	483