


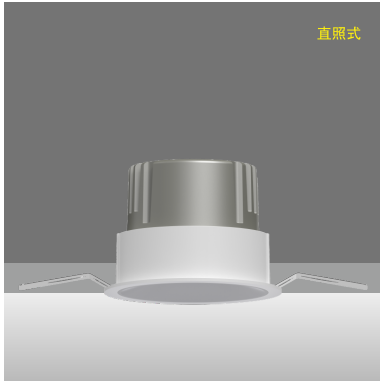


天花灯(Ø75)



*可选配件



产品特性

灯具颜色: 金属灰+白色面板
 主体材质: 压铸铝
 光学系统: 透镜
 灯具外观: 金属质感
 投射方向: 水平0~355°
 防护等级: IP20 可选配IP44防水组件
 环境温度: -20°~40°
 重量: 241g

产品规格

开孔尺寸: Ø75mm
 功率: 7W
 光束角度: 15°, 24°, 36°, 60°
 天花厚度: 2mm~25mm
 安装方式: 嵌入式
 吊顶空间: 大于115mm
 防眩角度: 40°

输入电压: 220~240V~50Hz
 输入电流: 33mA
 显指: Ra92
 色温: 2700K、3000K、3500K、4000K
 光通量: 406lm、423lm、452lm、469lm (15°)
 449lm、468lm、501lm、519lm (24°)
 480lm、500lm、536lm、556lm (36°)
 418lm、435lm、465lm、483lm (60°)

以下可调光款为可控硅调光; 0~10V调光:T改为M

2700K		3000K		3500K		4000K	
TFSF5075W07-TB2715		TFSF5075W07-TB3015		TFSF5075W07-TB3515		TFSF5075W07-TB4015	
TFSF5075W07-NB2715		TFSF5075W07-NB3015		TFSF5075W07-NB3515		TFSF5075W07-NB4015	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	29	2543	3650	1.0	29	2649	3802
2.0	57	636	913	2.0	57	662	951
3.0	86	283	406	3.0	86	294	423
4.0	114	159	228	4.0	114	166	238

2700K		3000K		3500K		4000K	
TFSF5075W07-TB2724		TFSF5075W07-TB3024		TFSF5075W07-TB3524		TFSF5075W07-TB4024	
TFSF5075W07-NB2724		TFSF5075W07-NB3024		TFSF5075W07-NB3524		TFSF5075W07-NB4024	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	39	1610	2354	1.0	39	1677	2452
2.0	79	403	589	2.0	79	419	613
3.0	118	179	262	3.0	118	186	273
4.0	157	101	147	4.0	157	105	153

2700K		3000K		3500K		4000K	
TFSF5075W07-TB2736		TFSF5075W07-TB3036		TFSF5075W07-TB3536		TFSF5075W07-TB4036	
TFSF5075W07-NB2736		TFSF5075W07-NB3036		TFSF5075W07-NB3536		TFSF5075W07-NB4036	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	62	795	1217	1.0	62	828	1268
2.0	123	199	304	2.0	123	207	317
3.0	184	88	135	3.0	184	92	141
4.0	246	50	76	4.0	246	52	79

2700K		3000K		3500K		4000K	
TFSF5075W07-TB2760		TFSF5075W07-TB3060		TFSF5075W07-TB3560		TFSF5075W07-TB4060	
TFSF5075W07-NB2760		TFSF5075W07-NB3060		TFSF5075W07-NB3560		TFSF5075W07-NB4060	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	91	402	606	1.0	91	419	631
2.0	181	101	152	2.0	181	105	158
3.0	271	45	67	3.0	271	47	70
4.0	362	25	38	4.0	362	26	40

