


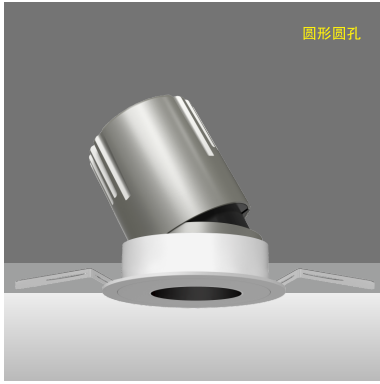


防眩圆孔天花灯(Ø75)

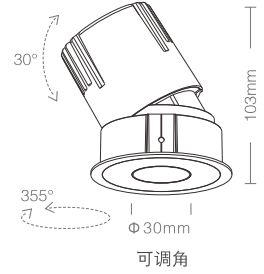

*可选配件



产品特性

灯具颜色: 金属灰+白色面板
 主体材质: 压铸铝
 光学系统: 透镜+面板
 灯具外观: 金属质感
 投射方向: 垂直0~30°、水平0~355°
 防护等级: IP20 可选配IP44防水组件
 环境温度: -20°~40°
 重量: 282g

产品规格

开孔尺寸: Ø75mm
 功率: 15W
 光束角度: 15°、24°、36°
 天花厚度: 2mm~25mm
 安装方式: 嵌入式
 吊顶空间: 大于115mm
 防眩角度: 40°

输入电压: 220~240V~50Hz
 输入电流: 70mA
 显指: Ra92
 色温: 2700K、3000K、3500K、4000K
 光通量: 796lm、829lm、887lm、943lm (15°)
 891lm、928lm、993lm、1030lm (24°)
 950lm、989lm、1058lm、1098lm (36°)

以下可调光款为可控硅调光; 0~10V调光:T改为M

2700K		3000K		3500K		4000K	
TSF1075W15-TB2715		TSF1075W15-TB3015		TSF1075W15-TB3515		TSF1075W15-TB4015	
TSF1075W15-NB2715		TSF1075W15-NB3015		TSF1075W15-NB3515		TSF1075W15-NB4015	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	29	4986	7157	1.0	29	5193	7455
2.0	57	1246	1789	2.0	57	1298	1864
3.0	86	554	795	3.0	86	577	828
4.0	114	312	447	4.0	114	325	466

2700K		3000K		3500K		4000K	
TSF1075W15-TB2724		TSF1075W15-TB3024		TSF1075W15-TB3524		TSF1075W15-TB4024	
TSF1075W15-NB2724		TSF1075W15-NB3024		TSF1075W15-NB3524		TSF1075W15-NB4024	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	39	3018	4454	1.0	39	3144	4640
2.0	79	755	1114	2.0	79	786	1160
3.0	118	335	495	3.0	118	349	516
4.0	158	189	278	4.0	158	197	290

2700K		3000K		3500K		4000K	
TSF1075W15-TB2736		TSF1075W15-TB3036		TSF1075W15-TB3536		TSF1075W15-TB4036	
TSF1075W15-NB2736		TSF1075W15-NB3036		TSF1075W15-NB3536		TSF1075W15-NB4036	
h(m)	D(cm)	average (lx)	center (lx)	h(m)	D(cm)	average (lx)	center (lx)
1.0	62	1573	2386	1.0	62	1639	2485
2.0	123	393	596	2.0	123	410	621
3.0	184	175	265	3.0	184	182	276
4.0	246	98	149	4.0	246	102	155

